



**FEATURES**

Automatic hand dryer with sensor operation. Designed for smaller environments requiring low noise levels and streamlined, minimal design. Durable stainless steel casing with theft resistant torx screws. Tamper-proof & safe intake opening. Pivot bracket inside cover for ease of installation. Made in Australia.

**INSTALLATION OPTIONS**

Electrical connection by cord & plug (as supplied). Can be direct wired by an electrician.


**SPECIFICATION**

- Electrical Supply: AC, 230-240V, 50Hz, 7A
- Motor: 65 Watt, 2500 RPM
- Element: 1600 Watt, protected by thermal cut-out
- Air Velocity: 16.2m/s
- Noise Level: 69dB (A)
- Weight: Gross 5.3kg, Shipping 5.9kg
- Certificate of Suitability No: Q070748
- Electrical Safety Requirement: AS/NZS 60335.2.23:2004
- Protection Category: IPX1

**FINISH**

Satin stainless steel, 304 grade, 16 gauge with No. 4 brushed finish. Charcoal polycarbonate intake/outlet grill.


**RECOMMENDED INSTALLATION HEIGHT**

Men's washroom	1200mm
Women's washroom	1150mm
Children's washroom age 11-15	1110mm
Children's washroom age 5-10	850mm
Disabled person's washroom	1000mm 


**WARRANTY**

JD MacDonald Applause hand dryer is guaranteed against defective materials and faulty workmanship for 12 months from date of purchase, subject to being installed in accordance with the Installation and Operating Instructions supplied with the hand dryer.


**Applause Satin Stainless Steel** shall be Model No. APP02/SSS as manufactured by JD MacDonald.

 All JD MacDonald disabled compliant products when installed must be in accordance with AS1428 to ensure the specified product is complying with all washroom specification requirements.


**Front View**

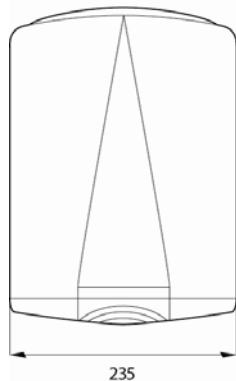

**Side View**

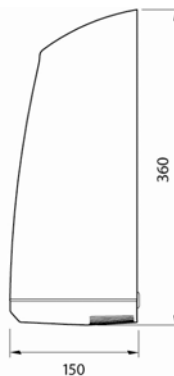

**Template View**



**Please use installation template supplied with product before commencing installation.**